



# INSTALLATION GUIDE

M1525CF


## Item Checklist

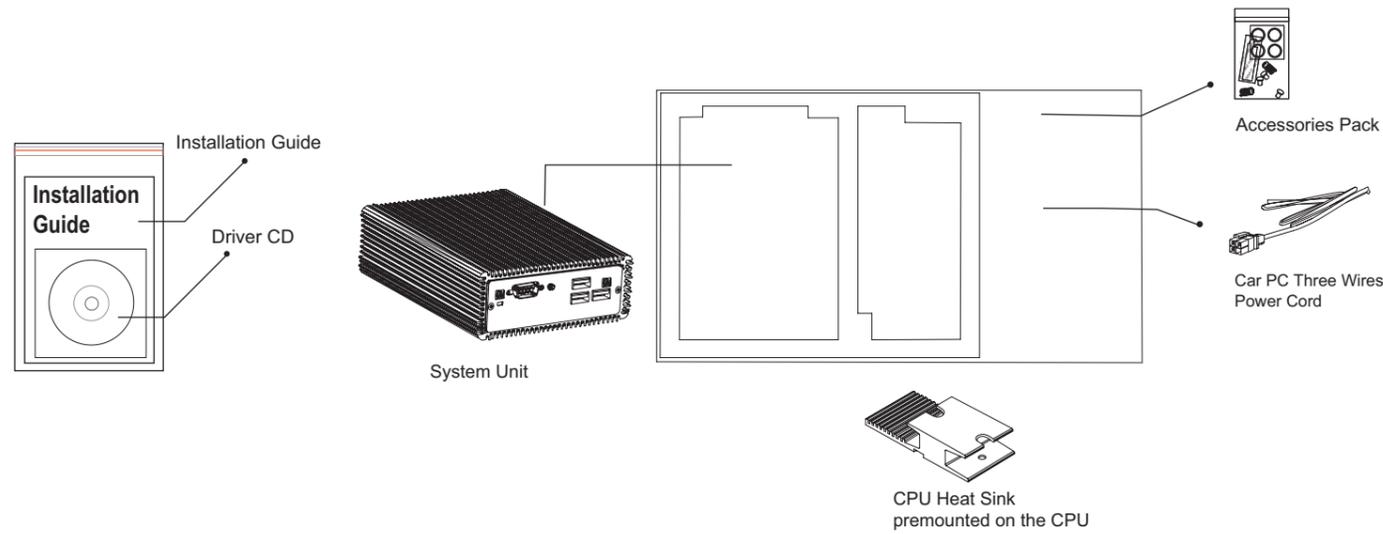

## Barebone Unit Unpacking

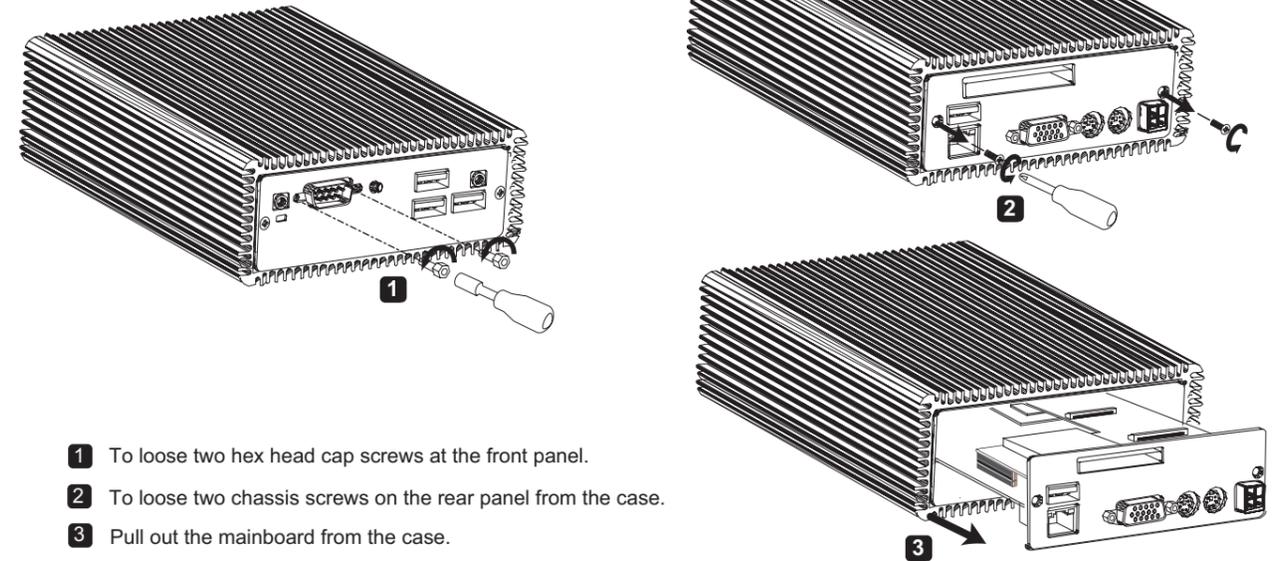


## Mainboard and Optional Daughter Boards' Layout

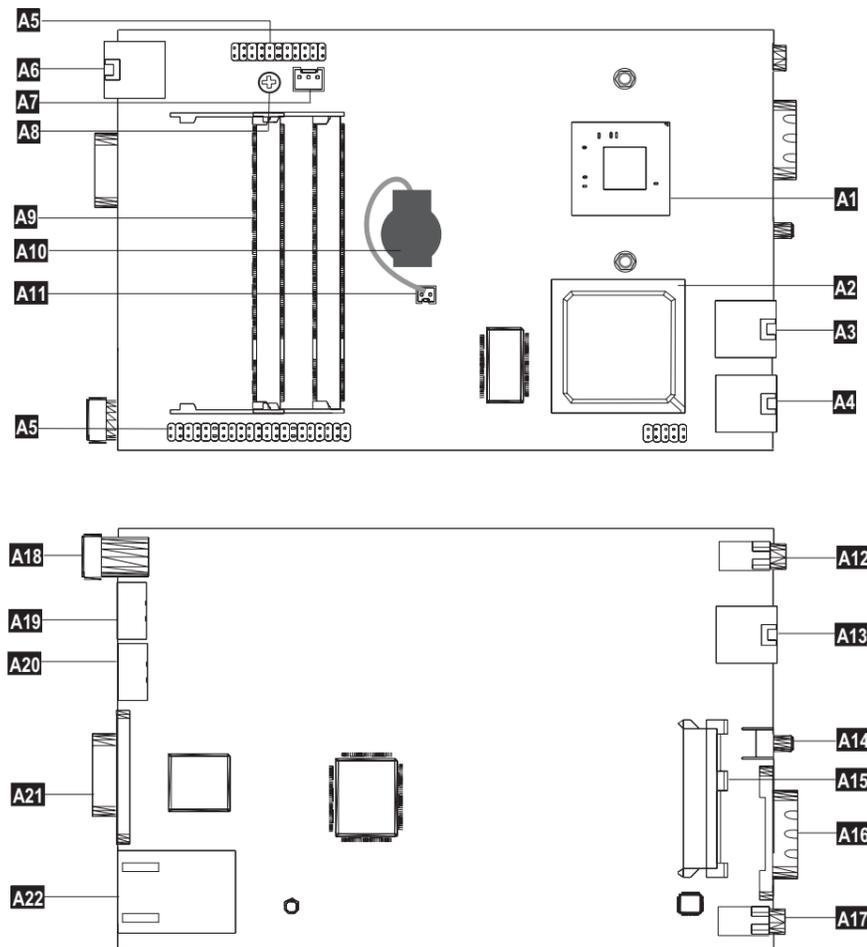


A1	ATOM D525 CPU
A2	Intel ICH8M chip
A3	Front USB port
A4	Front USB port
A5	Optional Multi-function adapter slot
A6	Rear USB port
A7	CPU cooling fan connector
A8	HDD Screw
A9	DDR3 SODIMM slots
A10	Line-out phone jack
A11	Front USB port
A12	Power button
A13	SATA HDD/SSD connector
A14	Primary COM port
A15	Mic-in phone jack
A16	DC 10V ~ 26V power input
A17	CMOS Battery connector
A18	PS/2 mouse port
A19	PS/2 keyboard port
A20	CMOS battery
A21	VGA port
A22	GigaLAN port

B1	Optional secondary COM port
B2	PCI express card slot
B3	Mini PCIe slot
B4	USB port


### Standard IO port alignment at front panel (S525CF)

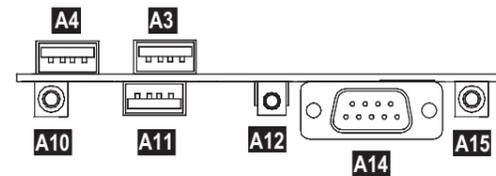


### Standard IO port alignment at rear panel (S525CF, S525SCF)

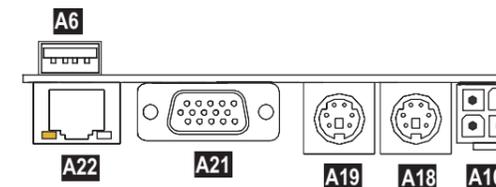

### Dual COM ports alignment at front panel (S525SCF)



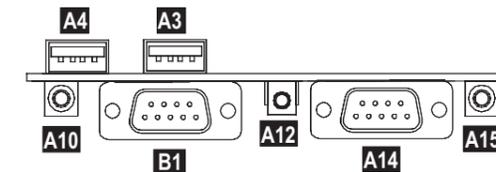


### Car PC Multi-function Daughter Board

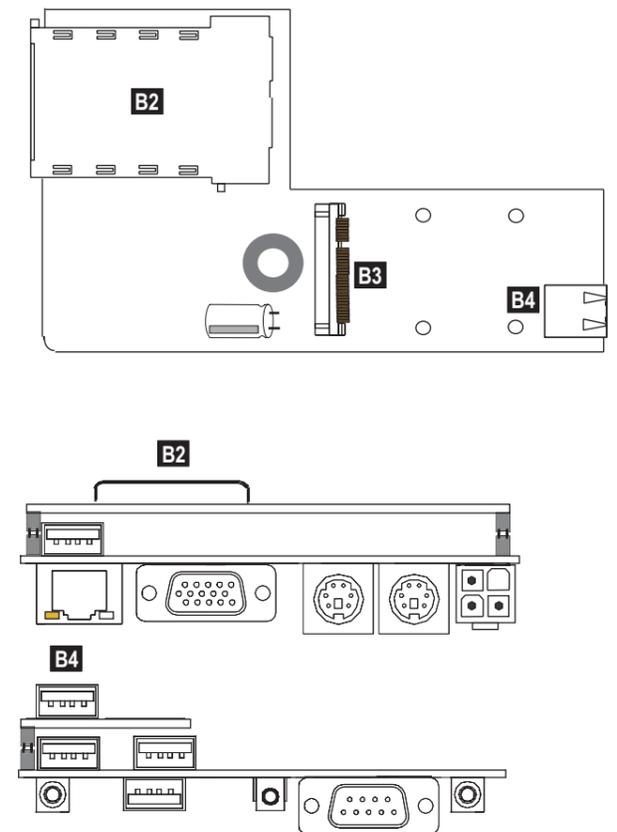

## Hardware Installation

### Part List


- (A)** COM/DVI Hex Head Cap Screws (\* 4) 
- (B)** Front Panel 
- (C)** Rear Panel 
- (D)** Case 
- (E)** Mainboard 
- (F)** CPU Heatsink 
- (G)** 3 Wires Power Cable 
- (H)** Car PC Daughter Board 

### Accessories Pack

- (A)** Hex Head Cap Screws \* 2 (\* 4 for S525S) 
- (I)** Case Screws \* 2 
- (J)** Rubber Stand \* 4 
- (K)** Mini card screw \* 2 
- (L)** Mini card spacer/fastener \* 4 

### STEP 1


#### Unpacking (Installing) Motherboard from (to) the chassis

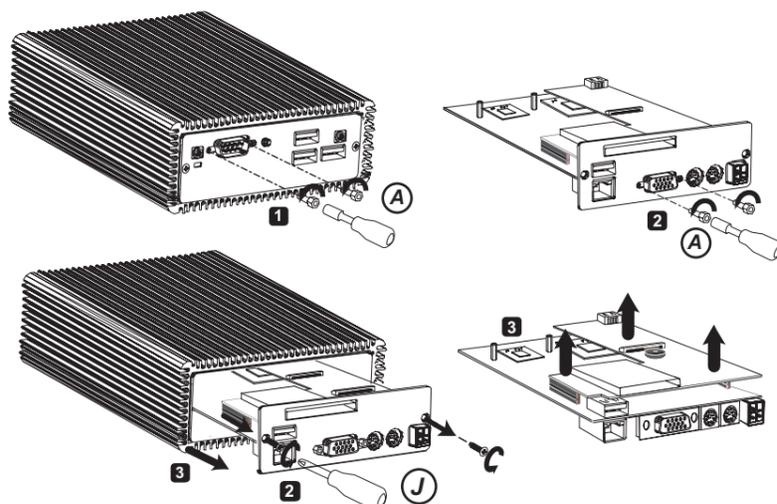

- 1** To loose (fasten) hex head cap screws at the front panel.
- 2** To loose (drive) two chassis screws at the rear panel.
- 3** Pull out (slide in) the motherboard from (into) the case.

### STEP 3


#### Installing 2.5" SATA HDD or SSD

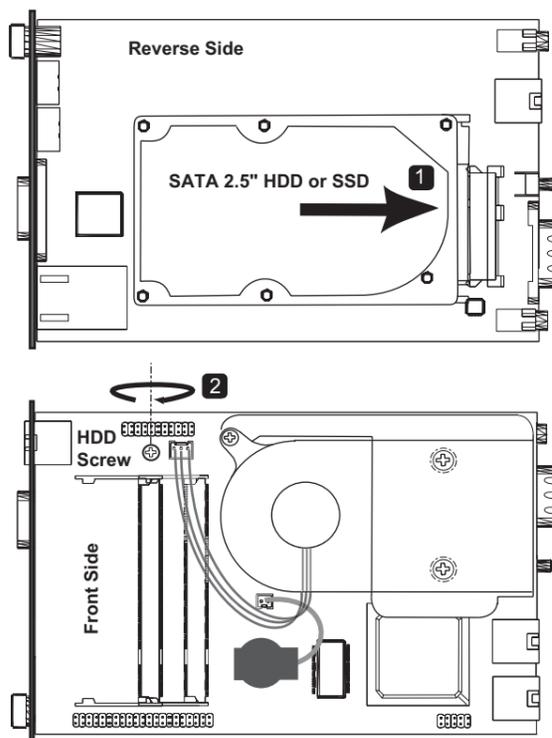

- 1** Insert 2.5" SATA HDD or SSD to the SATA connector on the reverse side of mainboard.
- 2** Turnover the mainboard and drive the screw at the front side of mainboard to fasten the HDD.

### STEP 2


#### Installing Memory

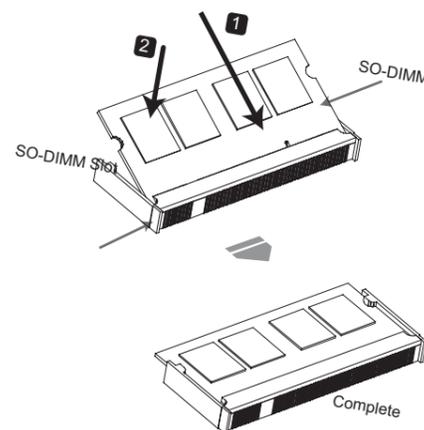

- 1** Insert SO-DIMM into the SO-DIMM slot on the motherboard by 30°.
- 2** Push down the SO-DIMM onto DIMM slot.

### STEP 5

#### Car PC Power Cord Connection

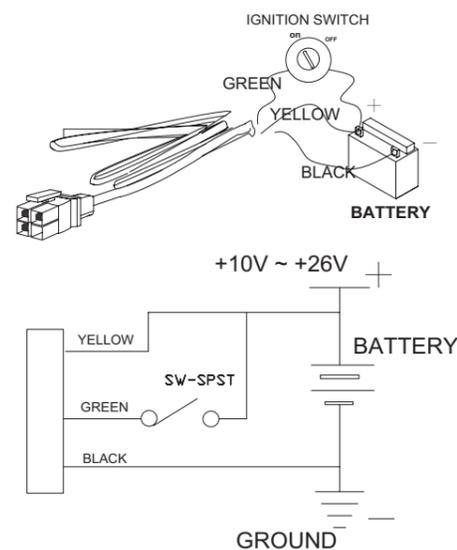

## WARNING

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- \* Reorient or relocate the receiving antenna.
- \* Increase the separation between the equipment and receiver.
- \* Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- \* Consult the dealer or an experienced radio TV technician for help.

Notice: The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equivalent.

*The system uses the chassis for heat dissipation, so the normal operating temperature of chassis is between 50°C ~ 65°C.*